

REGUPOL® ACOUSTIC UNDERLAY COLLECTION

ACOUSTIC SYSTEM FOR CARPET TILES

with Regupol® K225 5mm

Regupol®

Variofoam®



Regupol
Australia

Regupol® K225 5mm

The **Regupol® K225 5mm** is a soundproofing acoustic underlay manufactured from recycled SBR rubber granulates and cork, bound with polyurethane. The product composition produces an effective acoustic barrier to install parquet and timber floors directly to the surface finish. The cork and rubber combination ensures excellent cohesion between the polyurethane adhesive, the acoustic underlay and the timber floor.


Regupol® K225 5mm Impact Sound Acoustic Underlay has been installed in some of the world's finest multi-residential buildings providing a good level of impact sound reduction under timber flooring.

Benefits include:

- **Regupol® K225 5mm** has been independently tested to show it meets the Deemed-to-Satisfy provisions of the current building regulations in accordance with the Building Code of Australia Part F5.4 Sound Insulation Rating of Floors (Impact)
- Offers long term performance without collapse or bottoming out
- Minimal creep, even under high loads
- Quick and easy to install
- Minimises construction heights
- High quality and exact material thickness
- Suitable for use with under floor heating
- Protects expansion joints
- PVC Free
- Available in modular tiles for fast installation
- Excellent cohesion qualities
- Made from recycled materials
- German quality guaranteed
- Manufactured and certified to OHAS 18001:2007, DIN ISO 9001:2008, DIN ISO 14001:2004 Management Systems
- A Good Environmental Choice Australia certified sustainable product (GECA)
- Specify this acoustic system using NATSPEC

Product Data

Roll Length	20lm
Roll Width	1.0m
Modular Tiles	1050mm x 500mm
Thickness	5mm

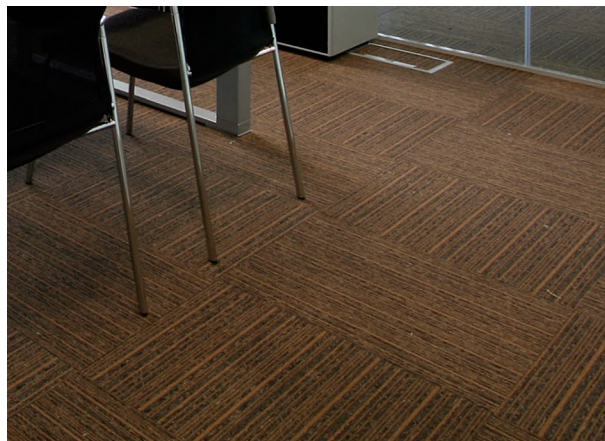

Typical application under carpet tile flooring



Regupol® K225 5mm impact sound acoustic underlay

Acoustic Performance

Regupol® K225 5mm is a soundproofing acoustic underlay designed to isolate approved floor finishes such as rubber floors from the main structure of the building, reducing impact energy generated by general footfall.

NOTICE: Test data is based on periodical testing of test specimen taken from the actual manufacturing process and show the average values measured. The publishing of these technical data does not relieve the user of the necessity to test the relevant product for physical fitness based on a specific application.

Direct Stick Carpet Tile Floors

with Regupol® K225 5mm

This system reflects a typical residential application with approved carpet tile floor coverings. For all other applications please contact Regupol's Technical Division. Please note that the drawings are not to scale and are for illustration purposes only.


Adhesive and Sealer Information




Regupol One Part Multi-Use Flooring Adhesive is a water based synthetic polymer, VOC compliant, multi-use flooring adhesive, with water resistant properties. This adhesive was specifically formulated to bond selected Regupol® products to most common interior sub-floors. The product is suitable for dry area installations only.



Regupol Primer 444 is a one part, solvent free, water based synthetic polymer resin formulated to be used on concrete substrates. Regupol Primer 444 is suitable for dry area installations only.

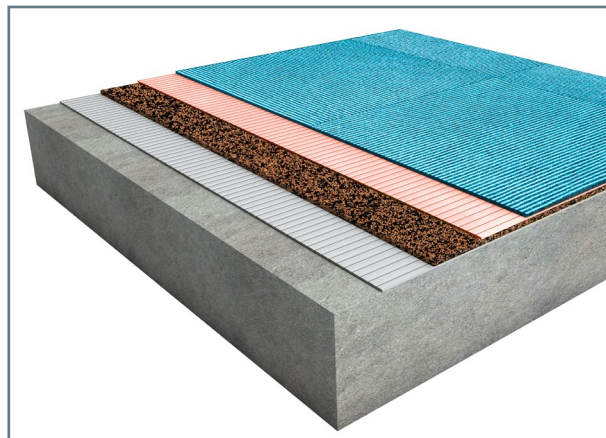

- 1 Approved Carpet Tile Floor
- 2 Approved Pressure Sensitive Adhesive
- 3 Regupol® K225 5mm Acoustic Underlay
- 4 Regupol One Part Multi-Use Flooring Adhesive
- 5 Concrete Substrate Prepared to AS1884-2012 with Regupol Primer 444

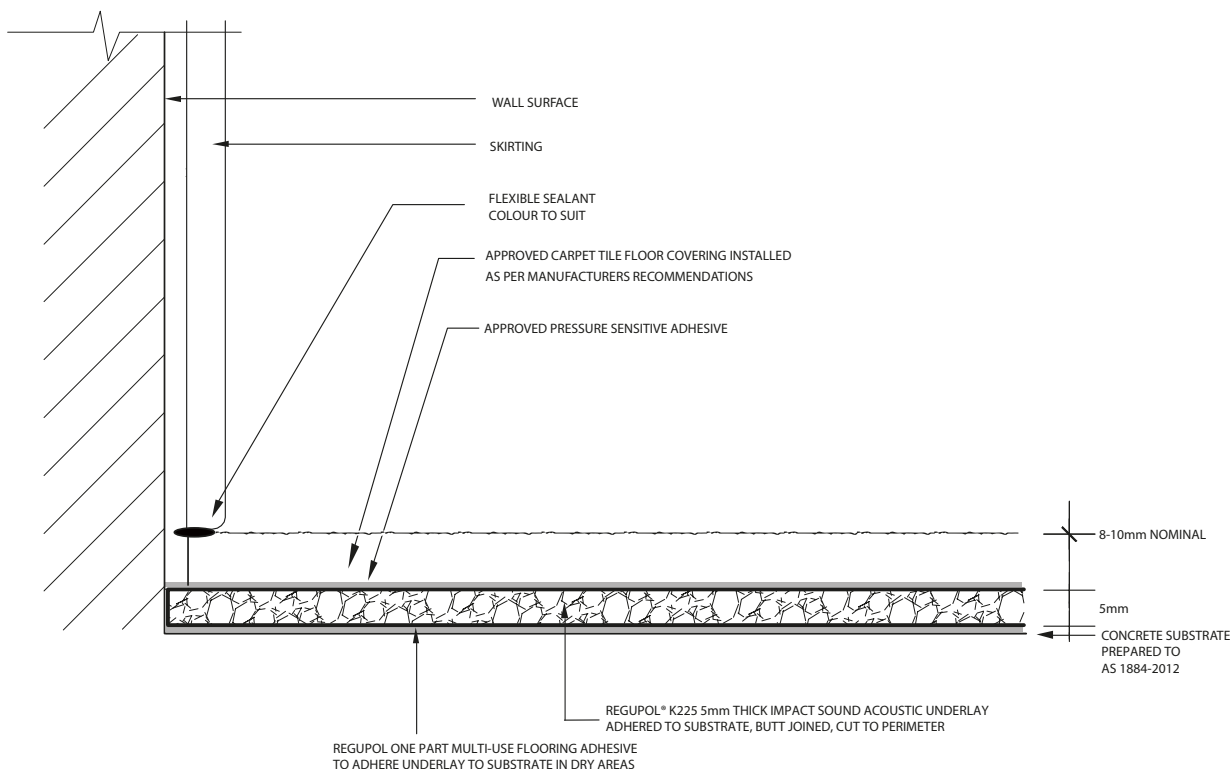

DISCLAIMER: The above information is given in good faith as a suggested guide in specifying Regupol® Impact Sound Acoustic Underlays, no guarantee or warranty is expressed or implied. Any circumstances not covered by this guide should be referred to Regupol (Australia) Pty Limited or its Distributors for any particular attention required. There are, however, many factors that may affect the outcome of projects using our products that are beyond our control. Regupol (Australia) Pty Limited cannot be responsible for poor climate conditions, inadequate surface preparation, poor application techniques, not observing curing times, improper thinning of adhesives or any variable beyond our control. No liability is accepted by Regupol (Australia) Pty Limited, our employees, distributors, representatives or agents, for any loss or damage, direct or indirect, that may result from using the information and/or suggestions as actual conditions for use that are beyond our control. All materials should be checked/tested for their suitability to the prevailing site conditions.